



**LEGEND™**

**Heavy-Duty 36" (914mm) Gas Range**

Item No. \_\_\_\_\_

Project \_\_\_\_\_

Quantity \_\_\_\_\_

**(- 11) Top Series**



Model 136-11

**SHORT/BID SPECIFICATION**

Range shall be a Montague *Legend* Model [Specify one]:

- 136-11**, with front-vented 40,000 BTU/hr conventional oven with counterweighted door, porcelainized steel interior, three-position rack guides and one wire pan rack standard
- V136-11**, with indirect-fired 45,000 BTU/hr convection oven with counterweighted door, porcelainized steel interior, five-position rack guides and three wire pan racks standard
- 36-11**, with open front cabinet base with two shelves;
- M36-11**, with 28" (711mm) high modular stand with stainless steel tubular legs;

...a 36" (914mm) wide heavy-duty gas-fired unit with one 35,000 BTU/hr, 18" (457mm) wide (French-style) hot top with ring and cover positioned at front of cast iron plate; and one 18" (457mm) heavy-duty cast iron, precision-ground open top grate, over two 30,000 BTU/hr lift off star burners; provided with individual burner controls and automatic standing pilots; with stainless steel front and exterior bottom, black painted sides and back, 4" (102mm) high flue riser and 3" (76mm) deep front rail standard; plus all the features listed and options/accessories checked:

**RANGE TOP FEATURES:**

**One 18" wide x 31" deep (457mm wide x 787mm) French-style Hot Top positioned left with:**

- Heavy-duty cast iron precision-ground plate with:
- Front-positioned removable ring & cover
- Front-fired, banjo-type 35,000 BTU/hr burner
- Heat transfer studs cast in plate bottom
- 2" (51mm) side and front flanges isolate heat under plate
- Insulating partition between top sections
- Sloped, brick-lined flues for better heat transfer

MODEL GUIDE			
✓	Model No.	Base Style/Type	-11 Range Top
	136-11	With Standard Oven	
	V136-11	With Convection Oven	
	36-11	With Cabinet Base	
	M36-11	With Modular Stand	

**One 18" wide x 31" deep (457mm wide x 787mm) open burner top with:**

- Heavily ribbed cast iron, surface-ground top grate positioned right with:
- Two large-diameter 30,000 BTU/hr lift off star burners with raised ports
- Automatic, standing pilots
- Drip pan positioned under burners

**STANDARD (136-11 MODEL) OVEN FEATURES:**

- 26" wide x 28" deep x 15" high (660mm x 711mm x 381mm) cooking compartment
- Accepts 18" x 26" (457mm x 660mm) pans sideways or lengthwise
- Front-venting oven design for more even cooking
- Heavy-duty counterweighted oven door — no springs
- Three-position adjustable nickel-plated rack supports, with one rack standard
- Interior panels and door porcelain-lined for long life & easy cleaning
- Low-to-500°F (260°C) thermostat mounted in insulated cool zone
- 40,000 BTU/hr cast iron burner with automatic ignition safety pilot

**CONVECTION (V136-11 MODEL) OVEN FEATURES:**

- 26" wide x 28" deep x 15" high (660mm x 565mm x 381mm) cooking compartment
- Muffled, indirect-fired design with blower, for fast-even cooking
- Heavy-duty counterweighted oven door — no springs
- Five-position adjustable nickel-plated rack supports, with three racks standard
- Interior panels and door porcelain lined for long life & easy cleaning
- Low-to-500°F (260°C) thermostat mounted in insulated cool zone
- 45,000 BTU/hr cast iron burner with automatic ignition safety pilot

**STANDARD CONSTRUCTION FEATURES:**

- Satin finish stainless steel front with 3" (76mm) deep front rail
- Other surfaces painted black with electrolytic zinc undercoating
- Stainless steel 102mm rear flue riser standard
- 6" (152mm) adjustable stainless steel legs standard (Except M36-11 Model)
- 28" (711mm) stainless steel tubular legs standard with M36-11 Model
- Cabinet base with sides, back panel and two shelves on 36-11 Model
- 1-1/4" NPT front gas manifold with 1/2 union on each end

**STANDARD WARRANTY:**

- One Year, Parts & Labor
- Lifetime Warranty on Oven Door

**AGENCY APPROVALS**

- NSF Listed
- ETL Design Certified to ANSI Z83.11



HDS-21 [Rev. 01/10]

Item No. \_\_\_\_\_


Project \_\_\_\_\_

Quantity \_\_\_\_\_

# LEGEND™ Heavy-Duty 36" (914mm) Gas Range

## (-11) Top Series

Dimensions in brackets are millimeters

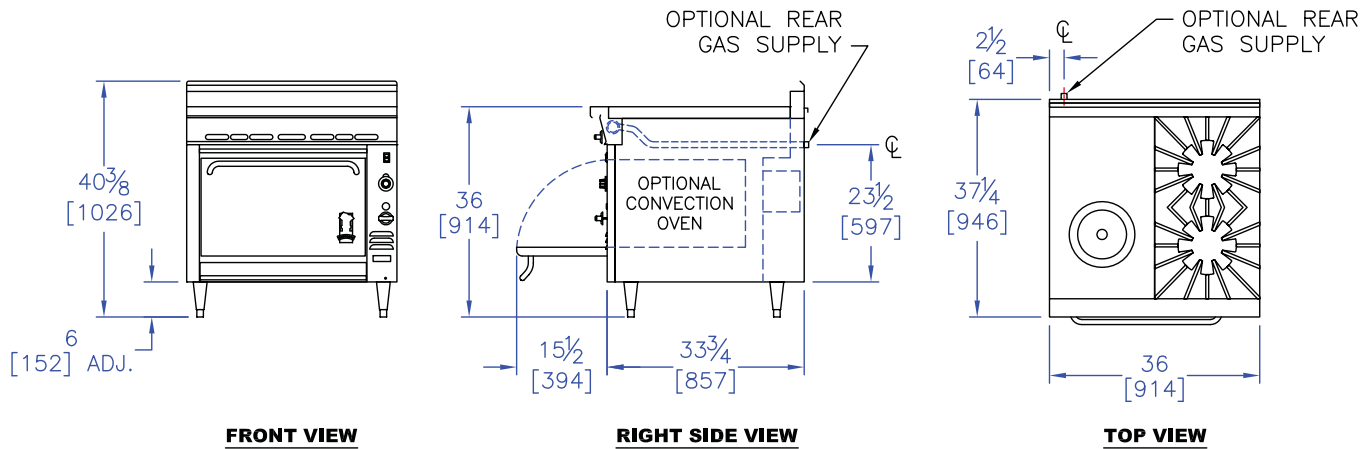

### OPTIONS GUIDE:

#### Top Range:

- 42" (1067 mm) range depth [add Suffix:-40]
- 304 stainless steel burner box assembly

#### Oven:

- Cast iron oven bottom
- Extra oven racks: \_\_\_\_ea.

#### Back Panels/Shelves:

- 18" (457mm) high back
- Single high shelf
- Double high shelf
- 6" (152mm) wide stainless steel plate shelf
- 8" (203mm) wide stainless steel plate shelf

#### Finish:

- Stainless steel left side panel
- Stainless steel right side panel
- Stainless steel back panel
- Stainless steel exterior bottom
- Stainless steel shelves and sides [36-11 Cabinet Model]

#### Manifolds: [Left rear with pressure regulator]:

- 1" NPT up to 400,000 BTU/hr
- Manifold Cap:**  left side  right side
- Stainless Manifold Cover:**  left side  right side

#### General:

- Casters — set of four 5" (127mm) casters
- Flex Connector Kit**  1" NPT:  3' (914mm)  4' (1219mm)
- Security Options/Prison Package** [Consult Factory]

### INSTALLATION REQUIREMENTS & SHIPPING INFORMATION

- Ovens & ranges must be installed in accordance with local codes or in their absence with the National Fuel Gas Code: ANSI Z223.1; Natural Fuel Gas Code: CAN/CGA-B149.1 or Propane Installation Code: CAN/CGA-B149.2, as applicable. Compliance with codes is the responsibility of the Owner and Installer.
- An adequate ventilation system is required. Refer to National Fire Protection Association Standard No. 96, "Vapor Removal from Cooking Equipment."
- This appliance is intended for commercial use by professionally trained personnel. NOT intended for Residential Use.
- Specify installation elevation: \_\_\_\_\_ if above 2,000 ft (610m).
- GAS INLET SIZE (All Models):** 1-1/4 NPT front manifold with 1/2 union on each end provided for battery connection. A properly sized gas pressure regulator must be furnished by the Installer.
- The incoming gas line pressure into the regulator should be 8"-14" w.c. for natural gas, and 12"-14" w.c. for propane gas.

Minimum Clearances	Combustible Construction	Noncombustible Construction
From Back Wall*	2" (51 mm)	0"
Left & Right Side	15" (381 mm)	0"
With 6" (152 mm) legs	Suitable for installation on combustible floors	
*V136 Models requires 2" (51mm) for motor clearance at rear		

Models:	Burners	Specify Type of Gas:		Shipping Weight	Shipping Class	Cube (Crated) ft <sup>3</sup> /m <sup>3</sup>
		<input type="checkbox"/> Natural	<input type="checkbox"/> Propane			
Gas Delivery Pressure:		6.0" WC	10.0" WC			
		BTU/hr (kW)	BTU/hr (kW)			
136-11	4	135,000 (39.6)	135,000 (39.6)	616 lbs (279 kg)	85	27/.75
V136-11	4	140,000 (41)	140,000 (41)	640 lbs (290 kg)	85	27/.75
36-11	3	95,000 (27.8)	95,000 (27.8)	430 lbs (195 kg)	85	27/.75
M36-11	3	95,000 (27.8)	95,000 (27.8)	360 lbs (163 kg)	85	13/.4

Entry Clearance: 30" (762mm) uncrated, with legs removed [All Models]

Due to continuous product improvements, specifications are subject to change without notice.



**THE MONTAGUE COMPANY**  
 1830 Stearman Avenue, Hayward, CA 94545  
 800 345-1830 • Fax: 510 785-3342  
 www.montaguecompany.com



HDS-21 [Rev. 01/10]