



**LEGEND™**

# Heavy-Duty 36" (914 mm) Gas Range

Item No. \_\_\_\_\_

Project \_\_\_\_\_

Quantity \_\_\_\_\_

## (-8) Top Series



Model 136-8

### SHORT/BID SPECIFICATION

Range shall be a Montague **Legend** Model [Specify one]:

- 136-8**, with front-vented 40,000 BTU/hr conventional oven with counterweighted door, porcelainized steel interior, three-position rack guides and one wire pan rack standard
- V136-8**, with indirect-fired 45,000 BTU/hr convection oven with counterweighted door, porcelainized steel interior, five-position rack guides and three wire pan racks standard
- 36-8**, with open front cabinet base with two shelves;
- M36-8**, with 28" (711 mm) high modular stand with stainless steel tubular legs;

...a 36" (914 mm) wide heavy-duty gas-fired unit with a 36" (914 mm) wide griddle top with 3/4" (19 mm) thick precision-ground cook surface, 4" (102 mm) high splash, 2-5/8" (67 mm) wide front grease trough with drop to grease receptacle and four 15,000 BTU/hr burners provided with individual burner control valves and automatic standing pilots; with stainless steel front and exterior bottom, black painted sides and back, 4" (102 mm) high flue riser and 3" (76 mm) deep front rail standard; plus all the features listed and options/accessories checked:

### RANGE TOP FEATURES:

One 36" wide x 28" deep (914 mm x 711 mm) griddle, with:

- 3/4" (19 mm) thick precision-ground steel cook surface
- 4" (102 mm) high backsplash and tapered side-splashes
- 2-5/8" (67 mm) wide grease trough pitched to grease receptacle
- Built-in 2-1/8" (54 mm) hanging grease receptacle
- Four 15,000 BTU/hr gas burners with standing pilots & gas control valves
- Adjusting bolts for changing griddle forward pitch

MODEL GUIDE		
Model No.	Base Style/Type	-8 Range Top
136-8	With Standard Oven	
V136-8	With Convection Oven	
36-8	With Cabinet Base	
M36-8	With Modular Stand	

### STANDARD (136-8 MODEL) OVEN FEATURES:

- 26" wide x 28" deep x 15" (660 mm x 711 mm x 381 mm) high cooking compartment
- Accepts 18" x 26" (457 mm x 660 mm) pans sideways or lengthwise
- Front-venting oven design for more even cooking
- Heavy-duty counterweighted oven door — no springs
- Three-position adjustable nickel-plated rack supports, with one rack standard
- Interior panels and door porcelain lined for long life & easy cleaning
- Low-to-500°F (260°C) thermostat mounted in insulated cool zone
- 40,000 BTU/hr cast iron burner with automatic ignition safety pilot

### CONVECTION (V136-8 MODEL) OVEN FEATURES:

- 26" wide x 22-1/4" deep x 15" high (660 mm x 565 mm x 381 mm) cooking compartment
- Muffled, indirect-fired design with blower, for fast, even cooking
- Heavy-duty counterweighted oven door — no springs
- Five-position adjustable nickel-plated rack supports, with three racks standard
- Interior panels and door porcelain lined for long life & easy cleaning
- Low-to-500°F (260°C) thermostat mounted in insulated cool zone
- 45,000 BTU/hr cast iron burner with automatic ignition safety pilot

### STANDARD CONSTRUCTION FEATURES:

- Satin finish stainless steel front with 3" (76 mm) deep front rail
- Other surfaces painted black with electrolytic zinc undercoating
- Stainless steel 4" (102 mm) rear flue riser standard
- 6" (152 mm) adjustable stainless steel legs standard (Except M36-8 Model)
- 28" (711 mm) stainless steel tubular legs standard with M36-8 Model
- Cabinet base with sides, back panel and two shelves on 36-8 Model
- 1-1/4" NPT front gas manifold with 1/2 union on each end

### STANDARD WARRANTY:

- One Year, Parts & Labor
- Lifetime Warranty on Oven Door

### AGENCY APPROVALS

- NSF Listed
- ETL Design Certified to ANSI Z83.11



HDS-15 [Rev. 01/10]

Item No. \_\_\_\_\_


Project \_\_\_\_\_

Quantity \_\_\_\_\_

# LEGEND™ Heavy-Duty 36" (914 mm) Gas Range

## (-8) Top Series

Dimensions in brackets are millimeters

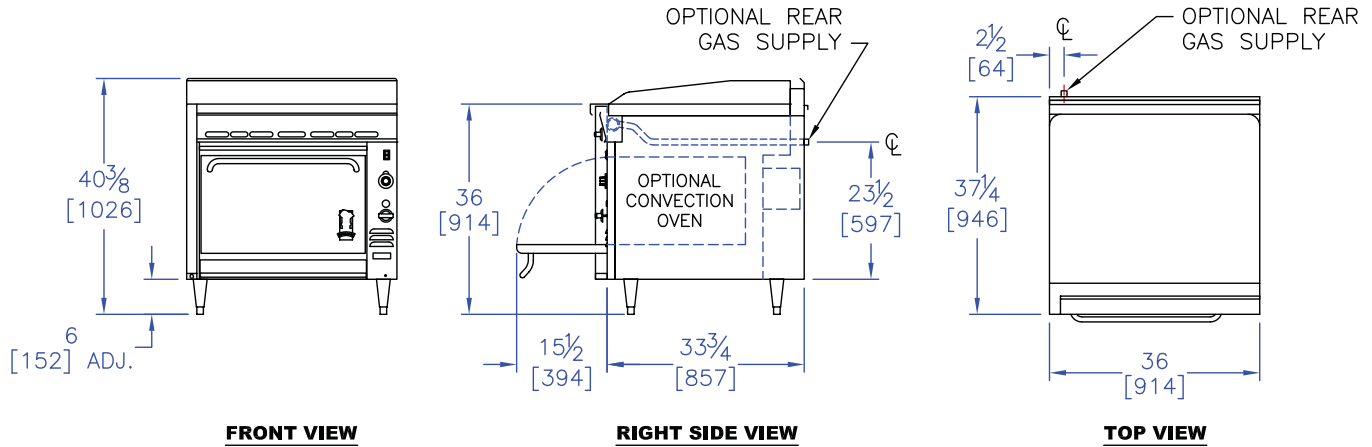

### OPTIONS GUIDE:

#### 36" (914 mm) Griddle:

- 450°F (232 °C) Thermostat Controls [-T Suffix]
- 1" (25 mm) thick griddle plate
- 1" (25 mm) thick grooved griddle plate
- 34" (864 mm) deep plate [Add Suffix -40]
- 42" (1067 mm) range depth [Add Suffix: -40]

#### Back Panels/Shelves:

- 18" (457 mm) high back
- Single high shelf
- Double high shelf
- 6" (152 mm) wide stainless steel plate shelf
- 8" (203 mm) wide stainless steel plate shelf

#### Oven:

- Cast iron oven bottom
- Extra oven racks: \_\_\_\_\_ea.

#### Manifolds: [Left rear with pressure regulator]:

- 1" NPT up to 400,000 BTU/hr
- Manifold Cap:**  left side  right side
- Stainless Manifold Cover:**  
 left side  right side

#### Finish:

- Stainless steel left side panel
- Stainless steel right side panel
- Stainless steel back panel
- Stainless steel exterior bottom
- Stainless steel shelves and sides [36-8 Cabinet Model]

#### General:

- Casters - set of four 5" (127mm) casters
- Flex Connector Kit**  [1"] NPT:  
 3' (914 mm)  4' (1219 mm)
- Security Options/Prison Package**  
 [Consult Factory]

### INSTALLATION REQUIREMENTS & SHIPPING INFORMATION

- Ovens & ranges must be installed in accordance with local codes or in their absence with the National Fuel Gas Code: ANSI Z223.1; Natural Fuel Gas Code: CAN/CGA-B149.1 or Propane Installation Code: CAN/CGA-B149.2, as applicable. Compliance with codes is the responsibility of the Owner and Installer.
- An adequate ventilation system is required. Refer to National Fire Protection Association Standard No. 96, "Vapor Removal from Cooking Equipment."
- This appliance is intended for commercial use by professionally trained personnel. NOT intended for Residential Use.
- Specify installation elevation: \_\_\_\_\_ if above 2,000 ft (610m).
- GAS INLET SIZE (All Models):** 1-1/4 NPT front manifold with 1/2 union on each end provided for battery connection. A properly sized gas pressure regulator must be furnished by the Installer.
- The incoming gas line pressure into the regulator should be 8"-14" w.c. for natural gas, and 12"-14" w.c. for propane gas.

Minimum Clearances	Combustible Construction	Noncombustible Construction
From Back Wall*	2" (51 mm)	0"
Left & Right Side	6" (152 mm)	0"
With 6" (152 mm) legs	Suitable for installation on combustible floors	
*V136 Models require 2" (51 mm) for motor clearance at rear		

Specify Type of Gas:		<input type="checkbox"/> Natural	<input type="checkbox"/> Propane	Shipping Weight	Shipping Class	Cube (Crated) ft <sup>3</sup> /m <sup>3</sup>
Gas Delivery Pressure:		6.0" WC	10.0" WC			
Models:	Burners	BTU/hr* (kW)	BTU/hr* (kW)			
136-8	5	100,000 (29.3)	100,000 (29.3)	646 lbs (293 kg)	85	32/.9
V136-8	5	105,000 (30.8)	105,000 (30.8)	670 lbs (304 kg)	85	32/.9
36-8	4	60,000 (17.6)	60,000 (17.6)	473 lbs (214 kg)	85	32/.9
M36-8	4	60,000 (17.6)	60,000 (17.6)	484 lbs (220 kg)	85	18/.5

\*For thermostatically controlled fry top add 20,000 BTU/hr (5.9 kW) total.

Entry Clearance: 30" (762 mm) uncrated, with legs removed [All Models]



**THE MONTAGUE COMPANY**  
 1830 Stearman Avenue, Hayward, CA 94545  
 800 345-1830 • Fax: 510 785-3342  
 www.montaguecompany.com

Due to continuous product improvements, specifications are subject to change without notice.



HDS-15 [Rev. 01/10]