



LEGEND™ Heavy-Duty 36" (914mm) Gas Extra Low-Boy Oven

Item No. _____

Project _____

Quantity _____

136XLB



Model 136XLB shown with UFLC-36R

| MODEL GUIDE | | | |
|-------------|-----------|--------------------|-----------------|
| ✓ | Model No. | Base Style/Type | Top |
| | 136XLB | With Standard Oven | Stainless steel |

STANDARD CONSTRUCTION FEATURES:

- Satin finish stainless steel front and exterior bottom
- Stainless steel top
- Other surfaces painted black with electrolytic zinc undercoating
- Stainless steel 1" (25mm) rear flue riser standard
- 6" stainless steel legs with adjustable bullet feet
- 3/4" NPT right-rear gas inlet & 3/4" NPT gas pressure regulator

AGENCY APPROVALS:

- NSF Listed
- ETL Design Certified to ANSI Z83.11 • CSA 1.8
- CE Approved • EN 203-1

SHORT/BID SPECIFICATION

Oven shall be a Montague **Legend** Extra Low-Boy Range-Base Model :

- 136XLB**, with front vented 32,000 BTU/hr conventional oven with counterweighted door, porcelainized steel interior, three-position rack supports and one wire pan rack standard

...a 36" (914mm) wide heavy duty gas-fired unit with stainless steel top; stainless steel front and exterior bottom, black painted sides and back, 1" (25mm) high flue riser standard; plus all the features listed and options/accessories checked:

STANDARD (136XLB MODEL) OVEN FEATURES:

- 26" wide x 28" deep x 10" high (660 x 711 x 254mm) cooking compartment
- Accepts 18" x 26" (457 x 660mm) pans sideways or lengthwise
- Front venting oven design for more even cooking
- Heavy duty counterweighted oven door — no springs!
- Three position adjustable nickel-plated rack supports, with one rack standard
- Interior panels and door porcelain lined for long life & easy cleaning
- Low-to-500°F (260°C) thermostat mounted in insulated cool zone
- 32,000 BTU/hr cast iron burner with automatic ignition safety pilot



HDS-51 [Rev. 1/12]

LEGEND™ Heavy-Duty 36" (914mm) Gas Extra Low-Boy Oven


Item No. _____

Project _____

Quantity _____

136XLB

Dimensions in brackets are millimeters

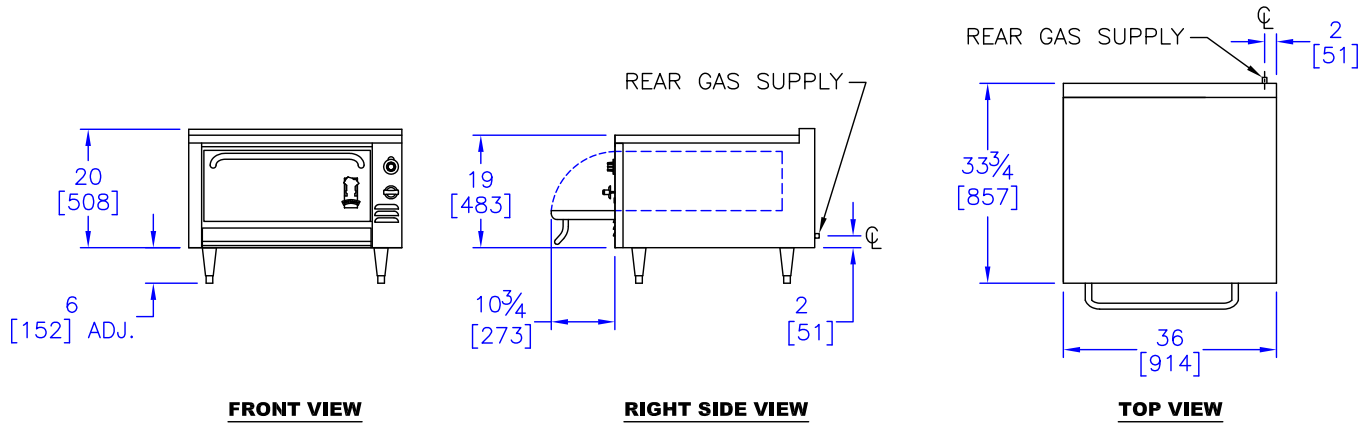

OPTIONS GUIDE:

Finish:

- Stainless steel left side panel
- Stainless steel right side panel
- Stainless steel back panel

Special Finish: [Consult factory]

Oven:

- Cast iron oven bottom [136LB Model only]
- Extra oven racks: ____ ea.

General:

- Casters — set of four 5" (127mm) casters
- Flanged feet with holes

Flex Connector Kit
[3/4"] or [1"]: NPT

- 3' (910mm)
- 4' (1219mm)

Security Options/Prison Package
 [Consult Factory]

International Approvals:

- CE - Conformance Européenne - EN203-1
Includes flame failure valve option
- AGA - Australian Gas Association - AS 4563
Includes flame failure valve option
- Canadian Approval

INSTALLATION REQUIREMENTS & SHIPPING INFORMATION

- Ovens must be installed in accordance with local codes or in their absence with the National Fuel Gas Code: ANSI Z223.1; Natural Fuel Gas Code: CAN/CGA-B149.1 or Propane Installation Code: CAN/CGA-B149.2, as applicable. Compliance with codes is the responsibility of the Owner and Installer.
- An adequate ventilation system is required. Refer to National Fire Protection Association Standard No. 96, "Standard for Ventilation and Fire Protection of Commercial Cooking Operations."
- This appliance is intended for commercial use by professionally trained personnel. NOT intended for Residential Use.
- Specify installation elevation:** _____ if above 2,000 ft (610m).
- GAS INLET SIZE (All Models):** 3/4" NPT gas connection provided at right-rear. 3/4" NPT gas pressure regulator is provided and must be installed (by others) when unit is connected to gas supply.
- The incoming gas line pressure into the regulator should be 8"-14" w.c. for natural gas, and 12"-14" w.c. for propane gas.

| Minimum Clearances | Combustible Construction | Noncombustible Construction |
|----------------------|---|-----------------------------|
| From Back Wall* | 2" (51mm) | 0" |
| Left & Right Side | 6" (152mm)* | 0" |
| With 6" (152mm) legs | Suitable for installation on combustible floors | |

| Models: | Burners | Specify Type of Gas: | Shipping Weight | Shipping Class | Cube (Crated) ft ³ /m ³ |
|---------|---------|----------------------------------|------------------|----------------|---|
| | | Manifold Pressure: | BTU/hr (kW) | | |
| 136XLB | 1 | <input type="checkbox"/> Natural | 403 lbs (183 kg) | 85 | 32/.9 |
| | | <input type="checkbox"/> Propane | | | |
| | | 6.0" WC | | | |
| | | 10.0" WC | | | |
| | | BTU/hr (kW) | | | |
| | | 32,000 (9.4) | | | |
| | | 32,000 (9.4) | | | |

Entry Clearance: 30" (762mm) uncrated, with legs removed [All Models]



THE MONTAGUE COMPANY
 1830 Stearman Avenue, Hayward, CA 94545
 800 345-1830 • Fax: 510 785-3342
www.montaguecompany.com

Due to continuous product improvements, specifications are subject to change without notice.



HDS-51 [Rev. 1/12]