




LEGEND™ Heavy-Duty Electric Induction Range

Item No. _____

Project _____

Quantity _____

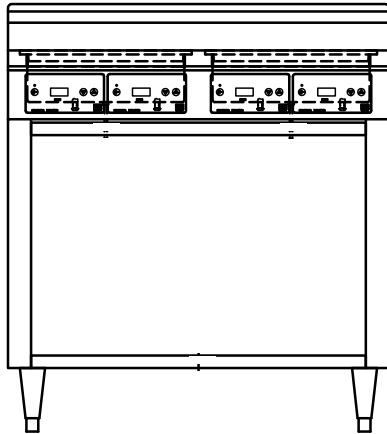

Model 36/MI4-14 shown

SHORT/BID SPECIFICATION

Range induction cooktop shall be a Montague **Legend Heavy Duty Model** [Specify one]:

- 36/MI4-14**, with four heat zones, 3.5 kW power per zone and Power-ON/heat control and heat setting LCD display for each zone over a 36" (914mm) stainless steel cabinet base with 2 shelves

...a 36" (914mm) wide unit with a stainless steel body, knob control panel on lower front control panel with advanced **Luxine Power™** control system; LCD power displays under glass top on top of unit; durable .236" (6mm) thick Ceran top plate, 6" (152mm) high height-adjustable feet and two 6' (1829mm) power cord standard; plus all the features listed and accessories checked

PERFORMANCE FEATURES:

- 3.5 kW induction power [per heating zone]
- Electric power conversion efficiency of over 90%
- Maximizes peak power for faster heat-up
- Superior low-end temperature control for delicate heating

MODEL GUIDE

✓	Model No.	Configuration	Electrical Power	Gas Power Btu/Hr
	36/MI4-14	Quad induction over cabinet base	14 kW	N/A

LUXINE POWER™ CONTROL:

- Detects size, shape and material of cook pan
- Automatically shuts off for unsuitable, empty or overheated pans
- Separate power- ON/OFF and heat-set control
- Digital 0-100 [% power] LCD readout, underglass matic ignition safety pilot

BASE CONSTRUCTION:

- Satin finish stainless steel body
- 36" (914mm) wide, 36" (914mm) high design
- Durable .236" (6mm) thick, easy-clean Ceran top plate
- Internal air-cooling fan(s)
- 6" (152mm) adjustable stainless steel legs standard
- 2-6' (1829mm) power cord and plug provided

AGENCY APPROVALS

- NSF Listed
- UL Listed to UL197 for USA and Canada



HCIR-2 [Rev. 1/12]


LEGEND™ Heavy Duty Electric Induction Range

Item No. _____

Project _____

Quantity _____

Dimensions in brackets are millimeters

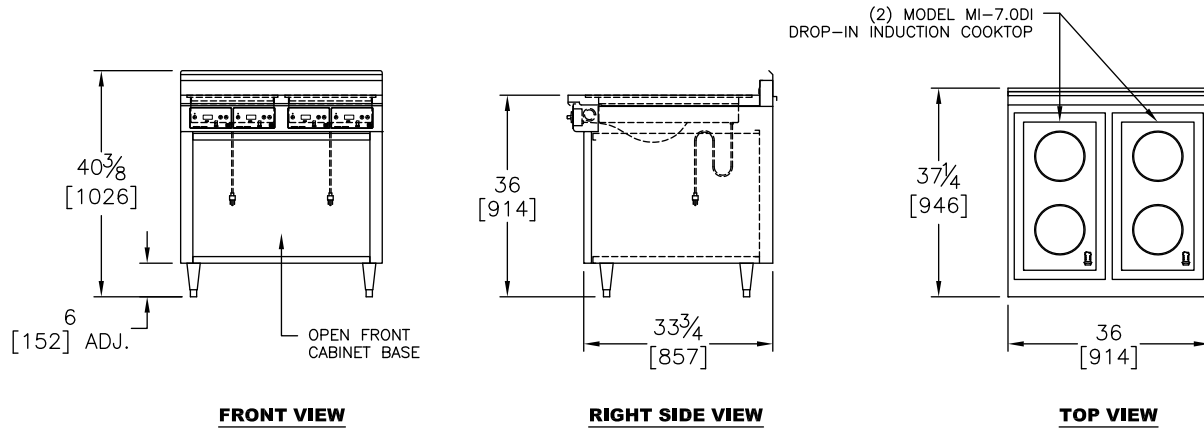

INDUCTION COOKTOP ACCESSORIES:

General:

- ___ ea. 8-1/2" (216mm) diameter fry pan*
Other sizes available [Consult Factory]
- *Minimum pan diameter - 4-1/2" (114mm),
Maximum pan diameter - 12" (305mm)

Back Panels/Shelves:

- 18" (457mm) high back
- Single high shelf
- Double high shelf
- 6" (152mm) wide stainless steel plate shelf
- 8" (203mm) wide stainless steel plate shelf

Manifolds: [1-1/4" (32mm) front manifold]:

- Manifold Cap:** left side right side
- Stainless Manifold Cover:**
 left side right side

Finish:

- Stainless steel left side panel
- Stainless steel right side panel
- Stainless steel back panel
- Stainless steel exterior bottom
- Stainless steel shelves and sides
[36-1E Cabinet Model]

General:

- Casters — set of four 5" (127mm) casters
- Security Options/Prison Package**
[Consult Factory]

INSTALLATION REQUIREMENTS & SHIPPING INFORMATION

1. Induction cooktop and oven must be installed in accordance with local codes or in their absence with the National Fuel Gas Code: ANSI Z223.1; Natural Fuel Gas Code: CAN/CGA-B149.1 or Propane Installation Code: CAN/CGA-B149.2, as applicable. Compliance with codes is the responsibility of the Owner and Installer.
2. An adequate Ventilation System is required. Refer to NFPA 96, Standard for Ventilation Control and Fire Protection of Commercial Cooking Operations.
3. Unit designed for operating in ambient air temperatures between 40-110°F (5-40°C). Do not expose unit to jet spray or high pressure steam.
4. This appliance is intended for commercial use by professionally trained personnel. NOT intended for Residential Use.
5. Load Capacity: Maximum weight of pan and contents is 55 lbs (25 kg).
6. Unit requires use of ferrous metal pans. [See Accessories Guide]
7. Specify installation elevation: _____ if above 2,000 ft (610m).
8. GAS INLET SIZE (All Models): 1-1/4 (32mm) front manifold with 1/2 union on each end provided for battery connection. A properly sized gas pressure regulator must be furnished by the Installer.
9. The incoming gas line pressure into the regulator should be 8"-14" w.c. for natural gas, and 12"-14" w.c. for propane gas.

Minimum Clearances	Combustible Construction	Noncombustible Construction
From Back Wall*	4" (102mm)	0"
Left & Right Side	6" (152mm)	0"
With 6" (152mm) legs	Suitable for installation on combustible floors	

Electric Requirements — All Models — Per Cooktop

Model	Heat Zone	Voltage	Phase	Hz	kW Input	Total AMPS	NEMA Plug*
36/MI4-14	4	240/208	1	50/60	14/12	58	6-30P(2)

*NEMA 6-50P provided for Canada.

Shipping Information:

Model	Weight	Shipping Class	Cube (Crated) ft ³ /m ³
36/MI4-14	470 lbs (213 kg)	85	32/.9



THE MONTAGUE COMPANY

1830 Stearman Avenue, Hayward, CA 94545
 800 345-1830 • Fax: 510 785-3342
 www.montaguecompany.com

Due to continuous product improvements, specifications are subject to change without notice.



HCIR-2 [Rev. 1/12]