




MONTAGUE
TECHNOSTAR

Medium-Duty Low-Boy Gas Double-Oven Bases

Item No. _____

Project _____

Quantity _____

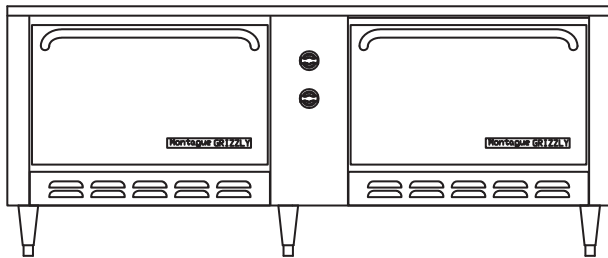

Model T2626LB shown

SHORT/BID SPECIFICATION

Ovens shall be a Montague *Technostar* Low-Boy Range-Base Model [Specify one]:

- T2616LB**, with 35,000 BTU/hr gas fired full size oven **positioned left** and 20,000 BTU/hr gas fired half-size oven **positioned right**; each with counterweighted door, porcelainized steel interior, four-position rack guides and one wire pan rack standard
- T1626LB**, with 20,000 BTU/hr gas fired half-size oven **positioned left** and 35,000 BTU/hr gas fired full-size oven **positioned right**; each with counterweighted door, porcelainized steel interior, four-position rack guides and one wire pan rack standard
- T2626LB**, with two 35,000 BTU/hr gas fired full size ovens positioned left and right; each with counterweighted door, porcelainized steel interior, four-position rack guides and one wire pan rack standard

...with heavy duty frame designed to support countertop equipment at an ergonomic work height, with stainless steel front, top and sides; 1-1/8" (29mm) high flue riser and 6" (152mm) height-adjustable feet standard; plus all the features listed and options/accessories checked:

STANDARD BASE CONSTRUCTION FEATURES:

- Satin finish stainless steel front, sides & top
- Stainless steel 1-1/8" (29mm) rear flue riser standard
- 6" (152mm) stainless steel legs with height-adjustable bullet feet
- 3/4" NPT left-rear gas inlet & 3/4" (19mm) gas pressure regulator

MODEL GUIDE

✓	Model No.	Oven Configuration	Base Width
	T2616LB	Full size-left, half-size right	60" (1524mm)
	T1626LB	Half-size left, full-size right	60" (1524mm)
	T2626LB	Two full-size ovens, left/right	72" (1829mm)

FULL-SIZE LOW-BOY OVEN FEATURES:

- 26" wide x 28" deep x 15" high (660 x 711 x 381mm) cooking compartment
- Front venting oven design for more even cooking
- Heavy duty counterweighted oven door — no springs!
- Four position adjustable nickel-plated rack supports, with one rack standard
- Interior panels and door porcelain lined for long life & easy cleaning
- Low-to-500°F (260°C) thermostat mounted in insulated cool zone
- 35,000 BTU/hr cast iron burner with automatic ignition safety pilot

HALF-SIZE LOW-BOY OVEN FEATURES:

- 16" wide x 28" deep x 15" high (406 x 711 x 381mm) cooking compartment
- Front venting oven design for more even cooking
- Heavy duty counterweighted oven door — no springs!
- Four position adjustable nickel-plated rack supports, with one rack standard
- Interior panels and door porcelain lined for long life & easy cleaning
- Low-to-500°F (260°C) thermostat mounted in insulated cool zone
- 20,000 BTU/hr cast iron burner with automatic ignition safety pilot

AGENCY APPROVALS

- NSF Listed
- CSA Design Certified to ANSI Z83.11 • CSA 1.8
- CE Approved • EN 203-1



HDCS-5 [Rev. 1/12]

Medium-Duty Low-Boy Gas Double-Oven Bases


Item No. _____

Project _____

Quantity _____

Low-Boy

Dimensions in brackets are millimeters

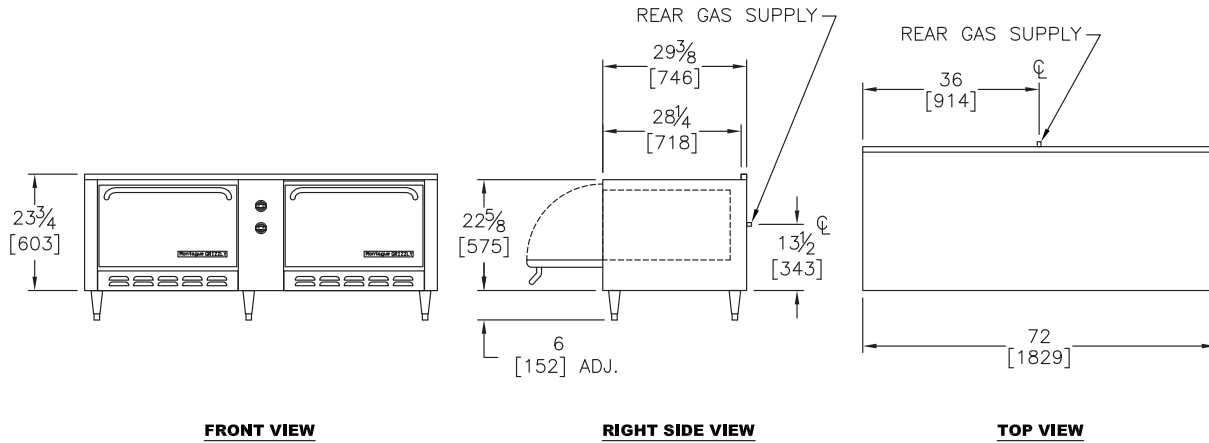

OPTIONS GUIDE:

General:

- Stainless steel back panel
- Extra oven racks, Full Size: _____ ea. Half size: _____ ea.
- Casters — set of six 5" casters
- Flex Connector Kit [3/4"/19mm]:
 - 3' (914mm)
 - 4' (1219mm)
 - 5' long (1524mm)

International Approvals:

- CE - Conformance Européenne - EN203-1
Includes flame failure valve option
- Canadian Approval

INSTALLATION REQUIREMENTS & SHIPPING INFORMATION

- Technostar units must be installed in accordance with local codes or in their absence with the National Fuel Gas Code: ANSI Z223.1; Natural Fuel Gas Code: CAN/CGA-B149.1 or Propane Installation Code: CAN/CGA-B149.2, as applicable. Compliance with codes is the responsibility of the Owner and Installer.
- An adequate ventilation system is required. Refer to National Fire Protection Association Standard No. 96, "Vapor Removal from Cooking Equipment."
- This appliance is intended for commercial use by professionally trained personnel. NOT intended for Residential Use.
- Specify installation elevation:** _____ if above 2000 feet (610m).
- GAS INLET SIZE (All Models):** 3/4" NPT at center rear. 3/4" NPT gas pressure regulator is provided. The gas supply pressure to the regulator must be 8"-14" WC for natural gas or 12"-14" WC for propane gas. Consult factory for different gas types and pressures.

Minimum Clearances	Combustible Construction	Noncombustible Construction
From Back Wall	2" (51mm)	0"
Left & Right Side	6" (152mm)	0"
With 6" (152mm) legs	Suitable for installation on combustible floors	

Specify Type of Gas:		<input type="checkbox"/> Natural	<input type="checkbox"/> Propane	Shipping Weight	Shipping Class	Cube (Crated) ft ³ /m ³
Models:	Burners	Manifold Pressure:	BTU/hr (kW)			
		6.0" WC	10.0" WC			
T2626LB	2	55,000 (16.1)	55,000 (16.1)	472 lbs (214 kg)	85	36/1
T1626LB	2	55,000 (16.1)	55,000 (16.1)	472 lbs (214 kg)	85	36/1
T2626LB	2	70,000 (20.5)	70,000 (20.5)	566 lbs (257 kg)	85	47/1.3
Entry Clearance: 24" (610mm) uncrated						



THE MONTAGUE COMPANY

1830 Stearman Avenue, Hayward, CA 94545
800 345-1830 • Fax: 510 785-3342
www.montaguecompany.com

Due to continuous product improvements, specifications are subject to change without notice.

